
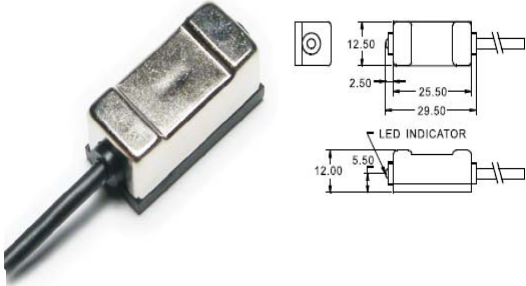
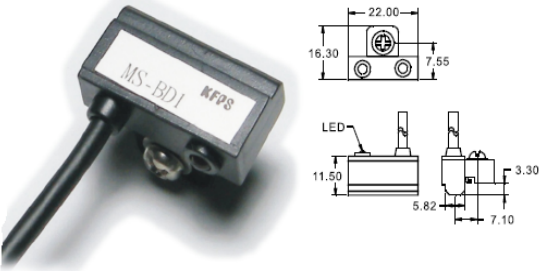


Magnetic inductive type

	<p>Features</p> <ul style="list-style-type: none"> • Small size. It is suitable for positioning detection of cylindrical, four corner column type cylinder and detection of thief prevention monitoring, level control, auto machine position ... etc. • Contact output, easy wiring, relay load, TR wiring, or C-MOS wiring. It may connect directly with PLC without extra power supply. • Equipped with LED action lamp. • Operating voltages are: 5~125VAC/DC, 12~250VAC/DC • Economic type, cheap price. • IP 67 structure protection, can be used safely under oil polluted, moisture .. severe environment. 		
<p>Type: MS-AD1/MS-A2</p> 	<p>Model: Operating voltage:</p>	<p>MS-AD1 24VDC, Below 110 VAC</p>	<p>MS-A2 Below 220 VAC 50/60Hz</p>
<p>Breakdown voltage:250VAC, 400VDC Load current: 200mA Response frequency: Below 3 KHz Contact point:1a Operating temp. -20 °C~+80 °C Tolerance switch frequency:10,000 cycles / 1 hr. Service life: more than 100,000,000 cycles</p>			
<p>Type: MS-BD1</p> 	<p>Model: MS-BD1 Operating voltage:24VDC, Below 110 VAC Breakdown voltage: 250VAC, 400VDC Load current: below 200 mA Response frequency: Below 3 KHz Contact point: 1a Operating temp.: -20 °C~+80 °C Tolerance switch frequency:10,000 cycles / 1 hr. Service life: more than 100,000,000 cycles</p>		