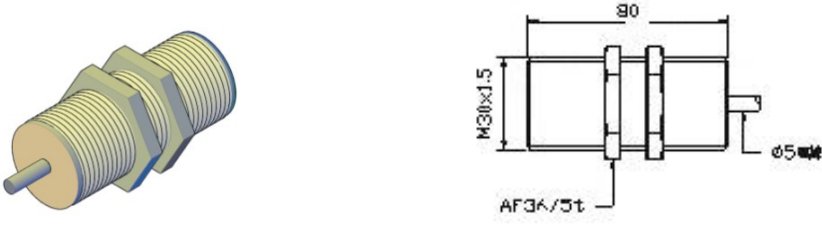


XA-M30 Series

- 👍 **Inductive Analog Output Sensors.**
- 👍 **Analog output 0 ~ 10V 、 sensing distance 5 ~ 10mm.**
- 👍 **High-intensity LED for sending indication.**
- 👍 **Good environmental resistance 、 all products are CE approved.**
- 👍 **High degree of protection up to IP67.**

|  | | | | |
|--|---------------|-------------------|--------------------|------------------|
| Model Number | Analog Output | Operating voltage | Response frequency | Sensing distance |
| XA-F30VP10 | 0 ~ 10V | DC 18~30V | 100Hz | 5 ~ 10mm |

| Item | Specifications |
|--------------------------------------|--|
| Standard sensing object | Iron, 30×30×1 mm |
| Installation | Shielded |
| Switching Output | PNP |
| Operation indicator | Yellow LED |
| Circuits protection | Short circuit protection |
| Enclosure protection | IEC IP67 |
| Ambient temperature & humidity range | Operating : -25 ~ 70°C / RH 35 ~85% (with no icing or condensation) |
| Housing material | Brass nickel-plated |
| Connecting method | Pre-wired 2M Cable |