


M5 Series

- 👍 **Long-distance detection at up to 1.2mm**
- 👍 **No-touch operation 、 high response frequency 、 wide application range.**
- 👍 **High-intensity LED for sending indication.**
- 👍 **Good environmental resistance 、 all products are CE approved**
- 👍 **High degree of protection up to IP67**

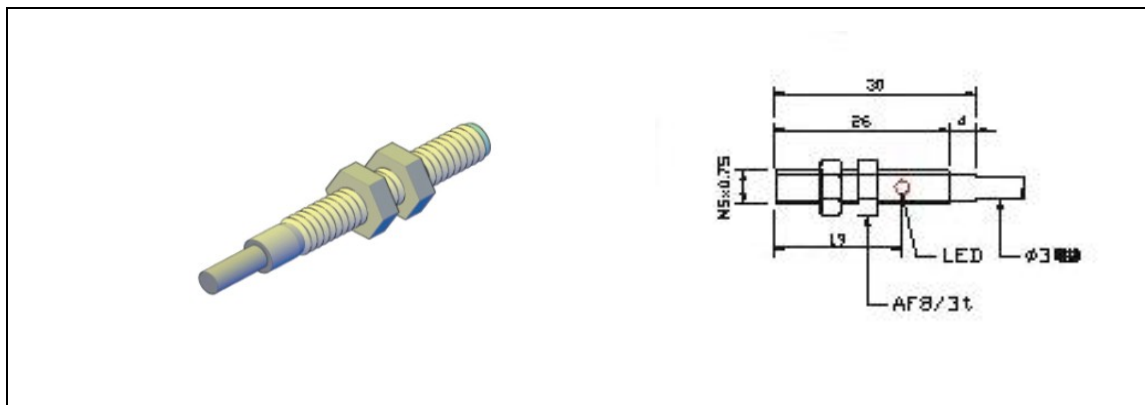

Switching Output	Model Number	Operating voltage	Response frequency	Sensing distance
DC 3-Wire NPN NO	XL-F05N0.8E1	DC 12~24V	2000Hz	0.8mm
	XL-F05N1.2E1			1.2mm
DC 3-Wire PNP NO	XL-F05P0.8E1			0.8mm
	XL-F05P1.2E1			1.2mm

Item	Specifications
Standard sensing object	Iron, 8×8×1 mm
Installation	Shielded
Load current	0 ~ 100mA
Operation indicator	Yellow LED
Circuits protection	Short circuit protection
Enclosure protection	IEC IP67
Ambient temperature & humidity range	Operating : -25 ~ 70°C / RH 35 ~85% (with no icing or condensation)
Housing material	stainless steel
Connecting method	Pre-wired 2M Cable