
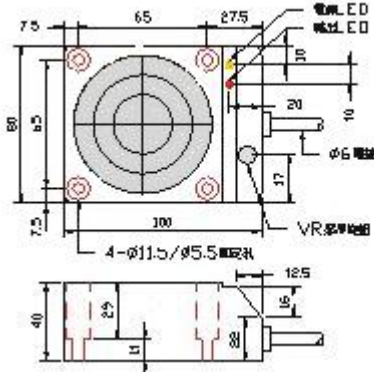


*XL Series*

- 👍 Long-distance detection at up to 60mm
- 👍 Operating voltage at 24VAC/DC,Relay output 1C
- 👍 No-touch operation 、 high response frequency 、 wide application range.
- 👍 High-intensity LED for sending indication
- 👍 Good environmental resistance 、 all products are CE approved
- 👍 High degree of protection up to IP67

				
Switching Output	Model Number	Operating voltage	Response frequency	Sensing distance
Relay NO/NC	XL-N80R60E3	24V AC/DC	25Hz	60mm

Item	Specifications
Standard sensing object	Iron, 120×120×1 mm
Installation	Unshielded
Load current	Relay Output 1C , 250VAC/1A 、 30VDC/1A
Operation indicator	Yellow LED
Circuits protection	Short circuit protection
Enclosure protection	IEC IP67
Ambient temperature & humidity range	Operating : -25 ~ 70℃ / RH 35 ~85% (with no icing or condensation)
Housing material	PBT
Connecting method	Pre-wired 2M Cable