


**M18 Series**

- 👍 **Completely stainless-steel housing**
- 👍 **No-touch operation · high response frequency · wide application range.**
- 👍 **High-intensity LED for sending indication.**
- 👍 **Good environmental resistance · all products are CE approved**
- 👍 **High degree of protection up to IP67**

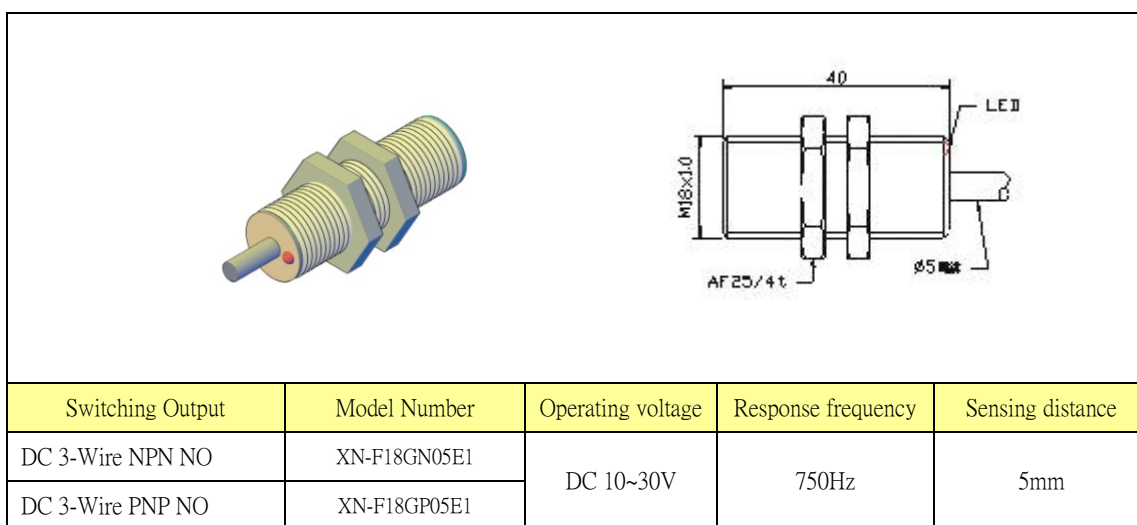

Item	Specifications
Standard sensing object	Iron, 18×18×1 mm
Installation	Shielded
Load current	0 ~ 200mA
Operation indicator	Yellow LED
Circuits protection	Short circuit protection
Enclosure protection	IEC IP67
Ambient temperature & humidity range	Operating : -25 ~ 70°C / RH 35 ~85% (with no icing or condensation)
Housing material	stainless steel
Connecting method	Pre-wired 2M Cable